




# KIT OBSTAFLASH OFI120

L-865/864 FAA (AC 150/5345-43H) Certified  
 ICAO white & red Medium intensity type A+B & C / CAA compliant (fixed mode)

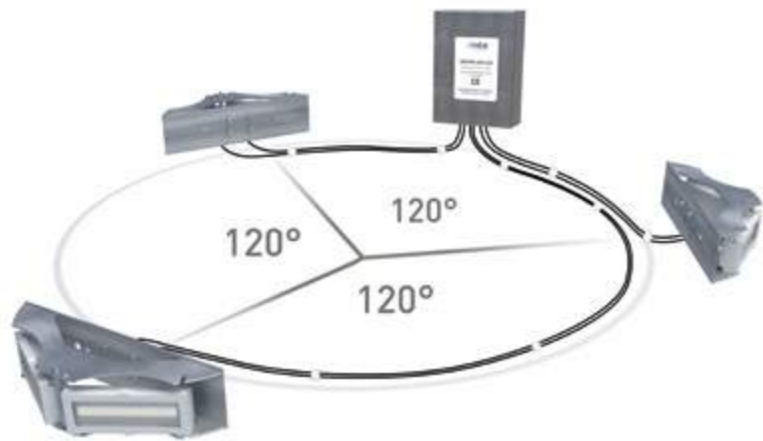

## Kit including 3 Obstaflash120

- 2 led projectors with 10 meters cable
- Aluminium and glass envelope
- Connection with connectors for dual color and gland for red only
- Precise optic for optimal power consumption,
- Electronic deported in external cabinet



## Power cabinet


- Stainless enclosure
- Surge protection
- Test button for day and night, 1 luminous indicator per white led projector,
- Modular design,
- Alarm contact
- Master/slave configuration for multiple cabinet
- Connection terminal for 48V low intensity at intermediale level working at night only
- Available with or without back-up power supply




## Product range OBSTAFLASH OF120

Kit including 3 Obstaflash120 medium intensity flashheads + power supply at same level,  
 ICAO White and Red Medium intensity type A and B & C / CAA / STAC


### OFI120 - XX - XXX - U - LX

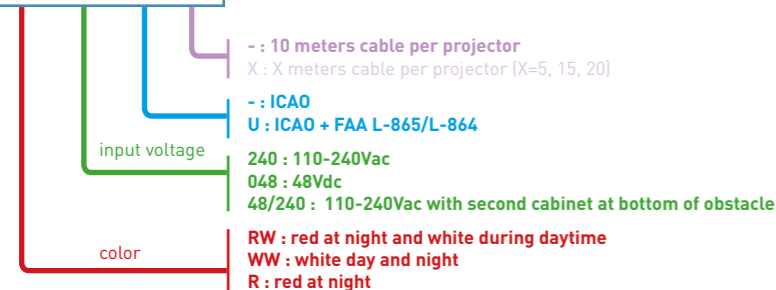

## COMPOSITION PER ITEMS

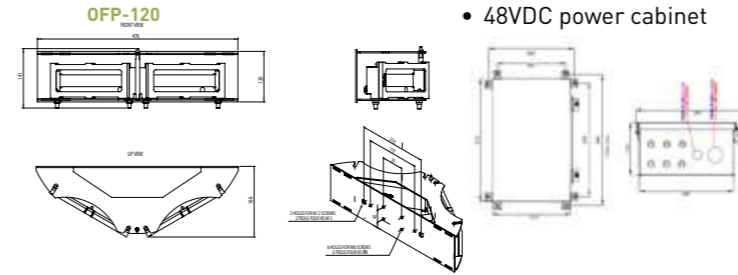

Power cabinet for 1 or 2 flashheads 113738M  
 and 2 to 12 flashheads 113745

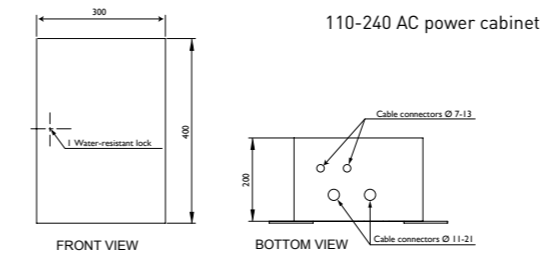

IP degree for power cabinet	65 in vertical position
Operating temperature	-30° to +55°C
Input voltage	110 VAC to 240 VAC 50 to 60 Hz or 48VDC +/-10%
Cable entry for flashhead, power supply, photocell and alarm	4 nickel plated brass

## ACCESSORIES

- GPS part number 113746 for wireless synchronization
- 48vdc photocell part number 100755
- 48Vdc battery cabinet (input voltage 100-240VAC) for 12 hours back-up part number 113956 (see page 50)

## MAIN CHARACTERISTICS

Main characteristics	Effective Luminous output on site at 0°		Color		Beam Spread		Flashes per minute
	Day	Night	Day	Night	Vertical	Horizontal	
<b>Red only (L864)</b>	light off	2000 Cd	light off	Red	> 3°	360°	As per ICAO or FAA
<b>White only (L865)</b>	20 000 Cd	2000 Cd or off	White	White or off			
<b>Dual color (L865/L864)</b>	20 000 Cd	2000 Cd	White	Red			

	Designation	part number	Power supply	ICAO category	FAA category	System components
	OFI120-RW-48/240-U	113758U	110-230 VAC	Medium intensity type A and B	L-865/L-864, dual color medium intensity	3 x OFP-120-RW-10L-U + OFP-CAB-6P-L-RW-048 + OFI-CAB-1E-RW-240-U
	OFI120-WW-48/240-U	113757U		Medium intensity type A	L-865 white medium intensity	
	OFI120-R-048/240	113756U		Medium intensity type B	L-864 red medium intensity	3 x OFP-120-R-10 + OFP-JB-6P-R + OFP-CAB-6P-1E-R-240
	OFI120-RW-048-U	113712U	48VDC	Medium intensity type A and B	L-865/L-864, dual color medium intensity	3 x OFP-120-RW-10L-U + OFP-CAB-6P-L-RW-048
	OFI120-WW-048-U	113711U		Medium intensity type A	L-865 white medium intensity	
	OFI120-R-048	113710U		Medium intensity type B	L-864 red medium intensity	3 x OFP-120-R-10 + OFP-JB-6P-R + OFP-CAB-6P-6E-R-048
	OFI120-RW-240-U	113715U	110-230 VAC	Medium intensity type A and B	L-865/L-864, dual color medium intensity	3 x OFP-120-RW-10L-U + OFP-CAB-6P-L-RW-240-U
	OFI120-WW-240-U	113713U		Medium intensity type A	L-865 white medium intensity	
	OFI120-R-240	113714U		Medium intensity type B	L-864 red medium intensity	3 x OFP-120-R-10 + OFP-JB-6P-R + OFP-CAB-6P-6E-R-240

• For more than 4 flasheads, "design your kit", see page xx.